

# White SON®

## High Pressure Sodium Lamps



### Ideal for...

- Accent/Display Lighting
- Downlighting



### ■ Incandescent-Like Color Performance

Produces warm, incandescent-like color with exceptional brightness and color rendering properties

### ■ Energy Efficient

Three times the efficacy and five times the life of incandescent lamps

### ■ Excellent Lumen Maintenance

Long life and reliable stable color performance

### ■ Choice of ED-17 or T-10 Lamps

- ED-17 diffuse coated medium screw base lamp offers low source brightness for downlighting applications
- T-10 clear lamp with PG-12 prefocus base provides precise optical control for accent and display lighting applications

### ■ Low Ultraviolet Output

Minimizes fading of materials

### ■ Rated For Use In Open Fixtures



## White SON® High Pressure Sodium Lamps

Electrical, Technical and Ordering Data (Subject to change without notice)

Product Number	Ordering Code	Lamp Watts	Lamp Volts	Lamp Operating Current (Amps)	Bulb	Bulb Finish	Base	ANSI Code/ Ballast Ref.	Light Center Length (In.)	Max. Overall Length (In.)	Arc Length (mm)	Rated Avg. Life <sup>(1)</sup> (Hrs.) <sup>(2)</sup>	Approx. Initial Lumens <sup>(3)</sup>	Approx. Mean Lumens <sup>(4)</sup>
31344-5	SDW-50W/LV/D	50	45	1.4	ED-17	Diffuse	Med.	S104	3 7/16	5 7/16	7	10000	2350	2000
31346-0	SDW-100W/LV/D	100	52	2.5	ED-17	Diffuse	Med.	S105	3 7/16	5 7/16	9	10000	4900	4170
30229-9	SDW-T50W/LV	50	45	1.4	T-10	Clear	PG-12	S104AF-50	3 9/16	5 7/8	7	10000	2500	2125
30228-1	SDW-T100W/LV	100	52	2.5	T-10	Clear	PG-12	S105NZ-100	3 9/16	5 7/8	9	10000	5200	4430

(1) Based on survival of at least 50% of the lamps, operated under specified test.  
 (2) 90% survival at 5000 hours.  
 (3) Based on photometry of 100-hour lamps in vertical position at rated watts. Lumen output rating applies to all operating positions.  
 (4) Lumen output at 50% rated life.


Operating Position . . . . .	Universal	Color Rendering index . . . . .	.85
Bulb Temperature (Max.):		Color temperature . . . . .	2700K
350° C (50W T-10), 400° C (50W & 100W ED-17), 450° C (100W T-10)		Base . . . . .	SDW (Medium Screw), SDW-T (PG-12)
Base Temperature (Max.):		Starter Pulse Voltage - Peak . . . . .	3500 Min., 4900 Max.
150° C (50W T-10), 190° C (50W & 100W ED-17), 180° C (100W T-10)		Pulse Width @ 90% Peak . . . . .	.05 Micro-Second Minimum
Maximum Lamp Current Crest Factor . . . . .	1.8	Pulse per Cycle (Minimum) . . . . .	1
Warm-up Time to 80% Brightness . . . . .	3-4 Minutes	Standard Package Quantity . . . . .	12
Restart Time for Hot Lamps . . . . .	1/2 Minutes		

### RECOMMENDED WARNINGS, CAUTIONS AND OPERATING INSTRUCTIONS

**WARNING:** These lamps must be operated in fixtures designed for use with High Pressure Sodium lamps. The fixture wattage rating must match the wattage indicated on the outer glass bulb. Do not scratch the outer bulb or subject it to pressure as this could cause the outer bulb to crack or shatter. A partial vacuum in the outer bulb may cause glass to fly if the glass is struck. Operating the lamp improperly may result in PERSONAL INJURY, PROPERTY DAMAGE, BURNS AND FIRE.

- If the outer glass bulb is broken, shut off power immediately and remove the lamp after it has cooled.
- Use only auxiliary equipment meeting Philips and/or ANSI standards. Use within voltage limits recommended by ballast manufacturer.
  - Operate lamp only within specified limits of operation.
  - For total supply load refer to ballast manufacturers electrical data.
- Protect lamp base, socket and wiring against moisture, corrosive atmospheres and excessive heat.
- Replace the lamp if the outer glass bulb has been scratched, cracked or damaged in any way.
- If a lamp bulb support is used, be sure to insulate the support electrically so as to avoid possible decomposition of the bulb glass.
- Do not use this lamp in a fixture which redirects a substantial portion of the energy toward the arc tube and its immediate vicinity, as this may lead to very early lamp failure.
- Take care in handling and disposing of lamps. If arc tube is broken, avoid skin contact with any of the contents or fragments.
- The arc tube of this lamp contains sodium and mercury. Dispose of lamp in accordance with federal, state and local requirements.

### Approximate Spectral Distribution

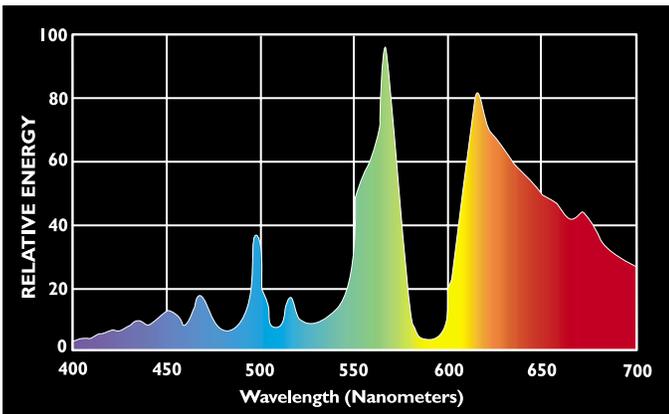

C.I.E. Color Coordinates	X	Y
50 Watt	.462	.414
100 Watt	.461	.410

**Maximum Color Shift:**  
 -250K (7500 hours)